


LONBUILDER TWISTED PAIR TRANSCEIVER

LONBUILDER TWISTED PAIR TRANSCEIVER

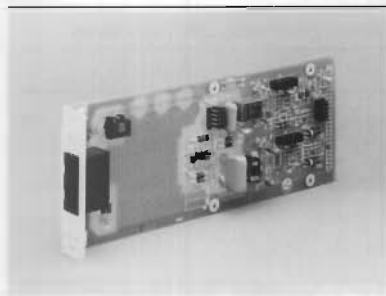

The LONBUILDER™ Twisted-Pair Transceiver is a board-level module that allows development and testing of remote nodes that communicate over twisted-pair media. Two selectable transceivers are on-board: a 1.25 Mbps transceiver for fast response/medium distance applications, and a 78 Kbps transceiver for longer distance/lower traffic applications. Each unit is shipped with a bus segment for quick installation of prototype distributed control networks. A terminator is provided with each unit; one terminator should be installed at each end of the twisted-pair bus.

FEATURES AND BENEFITS

- ▼ *Two transceivers on board:
1.25 Mbps transceiver for
high throughput, fast
response networks;
78 Kbps transceiver for
long distance, lower
throughput applications*
 - Enables fast prototyping of cost effective and reliable distributed control networks for a variety of applications, including:
 - Industrial Control
 - Building and Home Control
 - Machine Control
 - Medical Systems
 - Avionics
- ▼ *Collision detection circuit*
 - Improves response time
- ▼ *Polarity insensitive link*
 - Foolproof installation of nodes on the network
- ▼ *Automatic disconnect of
unpowered nodes*
 - Network is fault tolerant to power failures on individual nodes
- ▼ *Compatible with all processor
boards of the LONBUILDER
Developer's Workbench*
 - Supports development networks with emulators, SBCs, and routers
- ▼ *Preassembled terminators,
and a quick installation bus
segment are included*
 - Facilitates fast installation of prototype distributed control networks
- ▼ *Two topologies supported:
Bus topology and
quick-installation*
 - Provides the developer with a choice between quick installation for prototyping purposes, or evaluation of commercially installed topologies


TECHNICAL SPECIFICATIONS

Transceiver Type	78 Kbps	1.25 Mbps
Maximum Bus Loading*		
Custom Node Transceiver	64	64
LONBUILDER Transceiver	32	32
Maximum Stub length		
Custom Node Transceiver	3 meters	30 cm
LONBUILDER Transceiver	2.0 meters	5 cm
Maximum Bus Length	1300 meters	300 meters
Cable Description **	22 AWG Unshielded twisted-pair bus	
Cable segment for Quick Installation *** (included)	20 cm cable, with RJ 45 plug on both ends	
Isolation (Data Pair)	1500 V (60 second)	
Power	Locally-powered from emulator, SBC, or router	
Supply Voltage	5 V (+/- 5%)	
Temperature		
Operating	0 to 55°C	
Non Operating	-20 to 65°C	
Humidity (non-condensing)		
Operating	25-95% @ 40°C	
Non Operating	90% @ 60°C	
Dimensions	Board Size: 7.6 cm X 20.3 cm (3" x 8" x 0.75")	
Bus Connector	Dual female modular socket (RJ45)	
Terminators (included)	Required at both ends of the bus	

* In order to achieve maximum performance, the LONWORKS™ twisted-pair transceiver circuit should be laid out according to recommended layout guidelines that minimize parasitic circuit elements between the NEURON® CHIP, the transceiver circuit, and the attached stub segment. Each node that uses a twisted-pair transceiver that follows the recommended layout guidelines counts as one node equivalent. In order to provide added flexibility in a development environment, the LONBUILDER Twisted-Pair Transceiver does not follow the optimized layout guidelines. Therefore, each node that uses a LONBUILDER Twisted-Pair Transceiver counts as two node equivalents. Both type of nodes can be used on the same link as long as the limit of 64 node equivalents is not exceeded. See the LONWORKS Media Primer for more details.

** Echelon will provide information on cable vendors and their qualified products.

*** The quick installation topology uses 24 AWG unshielded twisted pair segments that can be easily plugged into the LONBUILDER Twisted-Pair Transceiver and forms a small, daisy chain topology. For evaluation of prototype networks with a large number of nodes and long distances, the bus topology should be used. See the LONWORKS Media Primer and the LONBUILDER Startup and Hardware Guide for more details.

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.



MOTOROLA

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.